



**Presto Stantest Pvt. Ltd.**

I-42, DLF Industrial Area Phase-1, Delhi Mathura Road, Faridabad 121003, Haryana, India



P : 9210 903 903, +91 129 4272727, 93111 24302 E : info@prestogroup.com

• Faridabad • Sonipat • Kolkata • Mumbai • Pune • Ahmedabad  
• Chennai • Bangalore • Hyderabad

www.prestogroup.com




## RCT/FCT/EDGE Crush Tester – Digital Cum Computerised - Wintest

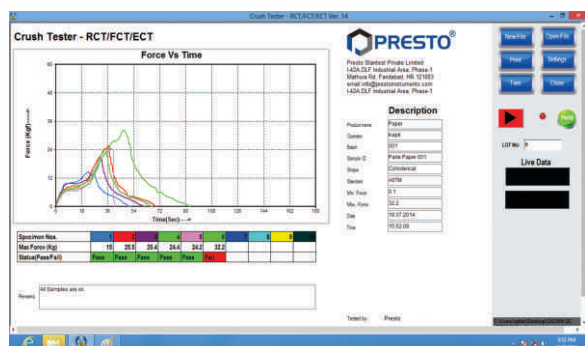


**Model No. PCT-100 (C) (Wintest)**

**RCT/FCT/Edge Crush Tester** is a consistent tool to measure the crush strength of cardboard boxes and packaging containers.


PRESTO RCT/FCT/Edge Crush Tester is manufactured under Test Standard IS 7063.

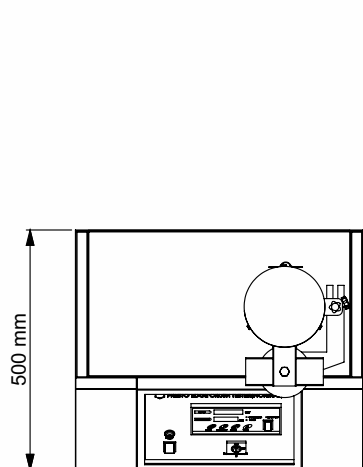

Top View

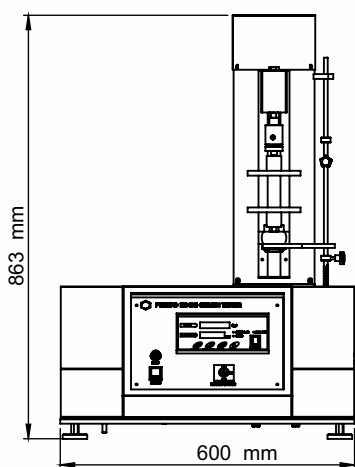

Front View

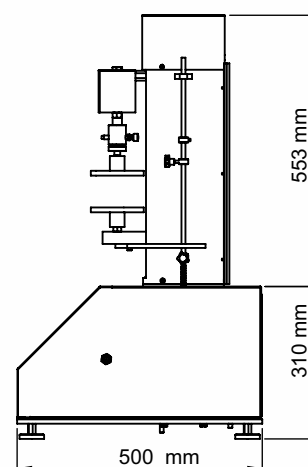

Side View

www.prestogroup.com



# Presto Stantest Pvt. Ltd.

I-42, DLF Industrial Area Phase-1, Delhi Mathura Road, Faridabad 121003, Haryana, India

P : 9210 903 903, +91 129 4272727, 93111 24302 E : info@prestogroup.com

• Faridabad • Sonapat • Kolkata • Mumbai • Pune • Ahmedabad  
• Chennai • Bangalore • Hyderabad

[www.prestogroup.com](http://www.prestogroup.com)



Available in Digital model (with and without printer facility) also.

- Microprocessor based display for accurate test results
- Display for compression strength of test specimen
- Separate fixtures for ring crush, edge crush and flat crush test.
- Highly accurate test results under compression force
- Strong gripping clamps.
- Bright LED display
- Inbuilt calibration facility
- Feather touch controls
- Graph test report is Force Vs Time
- 10 Sample test reports can be seen on one report
- Email facility of report
- Report Available in PDF format
- Pass/Fail Criteria can be programmed
- Easy Data Management. User can create product identification, test details etc.
- Inbuilt hardware/software CD

\*\* Computer & Printer not a part of the offer

RCT/FCT/Edge Crush Tester reveals the crushing resistance in terms of Kg/Unit length.

Optional Features:

Digital model (with or without printer facility) also available

The Ring Crush, Edge Crush, Flat Crush Strength tester measures the rigidity of CFB on edgewise.

## Key Specifications :

Load Cell Capacity	100 Kg
Display	<ul style="list-style-type: none"> <li>• LED (Digital)</li> <li>• Graphical</li> </ul>
Accuracy	$\pm 2\%$ at full load (with master load)
Least Count/Resolution	0.01 Kg
Power	220V, Single phase, 50 Hz
Test Speed	12.5 $\pm$ 2.5 mm/min

## Highlights :

Safety Switch	Upward & Downward Limit Switches
Material	Mild Steel
Finish	Powder coated Havel Gray & Blue combination finish and bright chrome / zinc plating for corrosion resistant finish
Dimensions	600 x 500 x 863 mm

Thank you customers for choosing us as your partners in growth !



\*All the above logos are the sole property of their respective owners and are used purely for depiction purposes only.

## OUR OTHER PRODUCTS :-

Box Compression Tester	Scuff Resistance Tester	Tensile Tester Digital	Spectrocolorimeter	Cobb Sizing Tester	Digital GSM Balance

[www.prestogroup.com](http://www.prestogroup.com)

