

## Presto Stantest Pvt. Ltd.

I-42, DLF Industrial Area Phase-1, Delhi Mathura Road, Faridabad 121003, Haryana, India P: 9210 903 903, +91 129 4272727, © 93111 24302 E: info@prestogroup.com



Faridabad • Sonipat • Kolkata • Mumbai • Pune • Ahmedabad
Chennai • Bangalore • Hyderabad


www.prestogroup.com

# Tearing Strength Tester -



**Tearing Strength Tester** is a consistent tool useful to determine the tearing strength of fabrics, plastic films and similar materials. Tearing Strength Tester is the tensile force required to rupture a pre-slit sample under controlled test conditions. PRESTO Tearing Strength Tester is designed as per standards ASTM D1424-09(2013), ASTM D624-00(2012), ASTM D1776, ASTM D689.

- High Quality rugged structure with corrosion resistant main body
- Pneumatic specimen clamping and automatic release of pendulum
- One touch hassle free operation
- Highly accurate test results under multiple pendulum weights
- Strong gripping fixture for holding test samples
- configurable display for result and reporting
- Inbuilt calibration weights
- Test Results include tear strength, tear per ply, average tear strength

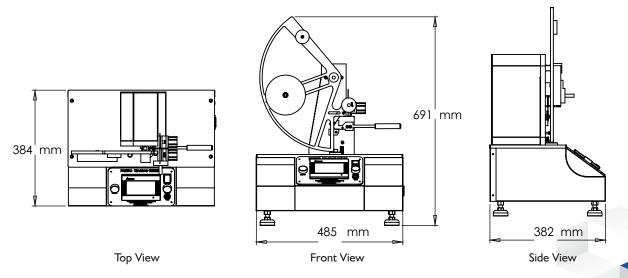



### Presto Stantest Pvt. Ltd.

I-42, DLF Industrial Area Phase-1, Delhi Mathura Road, Faridabad 121003, Haryana, India P: 9210 903 903, +91 129 4272727, S 93111 24302 E: info@prestogroup.com



• Faridabad • Sonipat • Kolkata • Mumbai • Pune • Ahmedabad • Chennai • Bangalore • Hyderabad

www.prestogroup.com

#### **Key Specifications:**

Force for Pendulum	1600, 3200 & 6400 gm force
Constant Radius of Tear	38 mm
Unit Scale range	0-100%
Slit Size	20 mm
Zero	Adjustable Zero Point
Calibration Check weight	At 1600gf, at 3200gf, at 6400gf
Input Air Pressure	2 to 4 kg cm <sup>2</sup> pressure
Port of Air Supply	Ø 6 mm putubing
Input Power Supply	220 V AC, Single Phase, 540 Hz
Data out put	USB Port

#### **Highlights:**

Clamps	Flat type
Legs	Adjustable legs
Material of Main Body	Mild Steel
Blades	Single edged
Angular Resolution	High resolution optical encoder
Angular Resolution	High resolution optical encoder

#### **Optional:**


• Higher Capacity 12800 gm force on request available.



Main Screen

TE	EARING S	TRENGT	TH TES	T		
ANGLE 12.3		TEST RESULT				
TEST	12	12345.67				
12	12.					
145678	Gr	GramForce				
	AVERAGE	PANDULAM HOLD	SAMPLE	RESET		

Test Screen



Test Profile Screen

1	12345.67	6	12345.67	
2	12345.67	7	12345.67	AVERAGE TEST
3	12345.67	8	12345.67	12345.67
4	12345.67	9	12345.67	12345.67
5	12345.67	10	12345.67	

**Test Report** 

Thank you customers for choosing us as your partners in growth!

































\*All the above logos are the sole property of their respective owners and are used purely for depiction purposes only.

#### **OUR OTHER PRODUCTS:-**













Box Compression Tester Scuff Resistance Tester

Tensile Tester Digital

Spectrocolorimeter

**Cobb Sizing Tester** 

Digital GSM Balance